




Load rating for Product pre-mounted with nail: ALH 22 in steel application: [95lbs]; in concrete application: [70lbs]; ALH 27: [95lbs]. Corresponds with mechanical strength according to UL Standard for Hardware for the Support of Conduit Tubing and Cable, UL2239; Mounting Orientation: Horizontal.



1 DX 5 F8 DX 5 F8 + X-PT 5	DX 351 ME DX 351 ME+ X-PT 351, DX 351-CT	DX 5 F8 DX 5 F8 + X-PT 2 DX 2 DX 2 + X-PT 2	

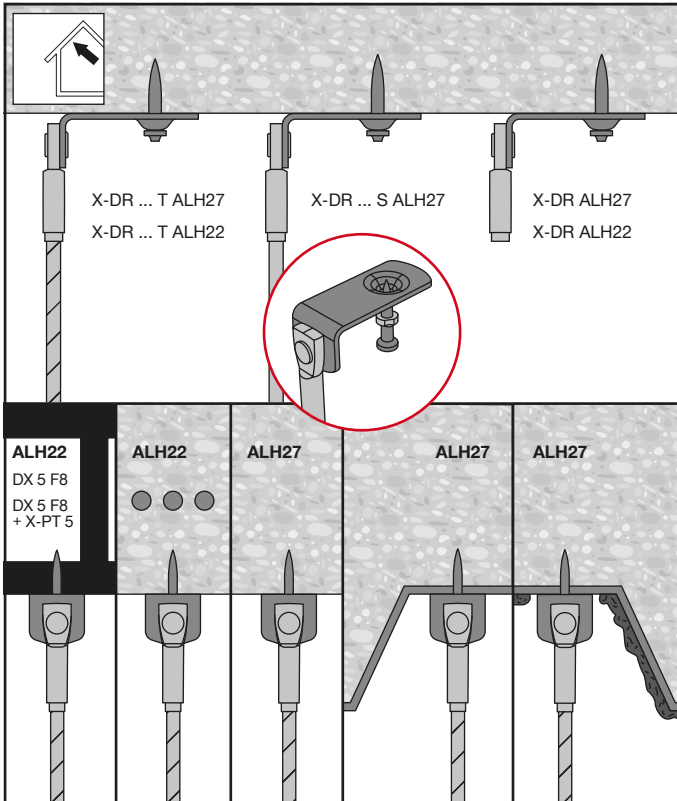